

IMPORTANT!

- DO NOT USE:** Abrasive cleaners such as: acid, ammonia, bleach, and similar solutions. Use of such solutions may cause corrosion, finish peeling, and/or dull the surface.
- DO NOT USE:** Abrasive sponges or cloth. Never use steel, wool, or wired brushes that will permanently scratch the surface.

Retain these installation instructions for future reference!

Thank you for using WOODBRIDGE products!

WOODBRIDGE®

California (Norwalk) Distribution Center
15600 Blackburn Ave, Norwalk, CA 90650

New Jersey (Somerset) Distribution Center
635 Pierce St, Somerset, NJ 08873

Florida (Orlando) Distribution Center
13645 S Orange Ave, Orlando, FL 32824

Canada (Ontario) Distribution Center
615 Orwell Street, Unit B, Mississauga, ON L5A2W4, Canada



Please don't hesitate to contact us if you have any questions or concerns.

Customer Service Phone: 562-229-0088. (Monday - Friday 9 AM - 5 PM Pacific Standard Time)

Or Email: help@woodbridgebath.com

INSTALLATION AND CARE GUIDE ELECTRONIC BIDET TOILET

WOODBRIDGE®

Model: **GT100**

Compliance with the following codes & standard:

- 2015 Uniform Plumbing Code® (UPC)
- 2018 International Plumbing Code® (IPC)
- 2018 International Residential Code® (IRC)
- ASME A112.4.2/CSA B45.16-2015 (R2020) Personal Hygiene Devices for Water Closet
- ASME A112.19.2/CSA B45.1-2018 (R2023)-Ceramic Plumbing Fixtures



READ ALL INSTRUCTIONS BEFORE UNPACKING THE PRODUCT

INSTRUCTIONS THAT, IF IGNORED COULD RESULT IN DEATH OR SERIOUS INJURY CAUSED BY INCORRECT HANDLING OR INSTALLATION OF THE PRODUCT. THESE INSTRUCTIONS MUST BE OBSERVED FOR SAFE INSTALLATION.

CAUTION!



**TWO PERSON
LIFT REQUIRED**

**2 PEOPLE ARE REQUIRED TO LIFT AND COMPLETE
INSTALLATION OF THIS PRODUCT**



**INSTALLATION OF THIS PRODUCT BY AN
INEXPERIENCED INSTALLER MAY RESULT
PERSONAL INJURY OR DEATH!**



We reserve the right to change, update, modify, alter, redesign this manual/product or its policies without prior notice!

We shall not be liable for any injuries or property damages in connection with this product during installation or use of this product!

- This product must be installed by a fully insured and licensed plumber only. Installation of any our products by anyone other than fully insured and licensed plumber shall void limited warranty. We recommend that such licensed plumber have experience in the installation of products.
- Limited warranty is void on any commercial installation.
- We are not responsible for local code compliance for this product. Building and plumbing codes may vary from state-to-state in accordance to your location. We are not responsible for providing any compliance certifications.
- Under no circumstances we shall not be liable for any and all incidental damages sustained in connection with this product. Neither manufacture, nor distributor, nor retailer is responsible for water damage or flood caused due to use of this product.
- Under no circumstances We shall not be liable for any and all fees, cost of installation/reinstallation/removal, subsequent damage or transportation in case of the product defect.

CAUTIONS AND WARNINGS

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Please read this statement thoroughly and ensure its proper use. Strictly adhere to all written cautions and warnings provided.

Meaning of the Marks:

-  **DON'T:** This symbol indicates a prohibited use of the product.
-  **MUST:** This symbol is used to indicate a required step in the use of this product.

 DON'T DISASSEMBLE	Never disassemble, repair or alter. Do not use tools in areas other than designated in this manual. Doing so may cause fire, electrical shock, overheating, short circuit or equipment failure.
 DON'T SPLASH WATER	Do not get any water or cleaning solution on the main unit or connection of power cord. - Doing so may cause fire, electrical shock, heat or short circuit. - Doing so may cause the product to crack resulting in injury or water damage.
 DON'T	Do not use the product if a malfunction occurs. - In case of malfunction or other problems, be sure to cut off power by switching to OFF. Close the water shut off valve to stop water supply. Possible malfunctions: - Water is leaking from a pipe or the main unit. - The product is cracked or broken. - The product makes a strange noise or emits a strange odor. - The product emits smoke. - The product is abnormally hot.

CAUTIONS AND WARNINGS

 DON'T	The toilet seat is out of place. Continued use of the product after a malfunction could result in fire, electrical shock, overheating, short circuit, injury, or water damage.
	Continued use of the smart toilet after a malfunction could result in fire, electrical shock, overheating, short circuit, injury, or water damage. Please contact professionals for assistance.
	Use tap water only. Using other types of water may cause irritation to the skin and malfunction of the product.
 STOP	Do not use a loose or unstable power socket. Doing so may cause fire or electrical shock.
	Insert the power plug into an AC socket rated for 110V to 60Hz and 15A or above. Failure to do so could result in fire or electrical shock. If the power exceeds the socket's specification, it may cause overheating and potentially lead to fire.
	Do not perform any actions that may damage the power plug. Avoid striking, yanking, twisting, excessively bending, damaging, altering, or heating the power cords. Additionally, do not place any heavy objects on, bind, or pinch the power cords. Using a damaged power cord may result in a fire, electrical shock, heat or short.
 MUST	This is an electrical product. Do not install it anywhere water is likely to get on the product or anywhere with humidity high enough that water is likely to form on the surface of this product. When using the product in a bathroom, install a fan or ventilation port and ensure good air flow through the bathroom. Failure to do so may cause fire or electrical shock. If the power cord is damaged, it must be replaced by the manufacturer, its service agent, or another qualified professional to avoid hazards.

CAUTIONS AND WARNINGS

 MUST	If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
	Children being supervised not to play with the appliance. The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction. • To prevent low-temperature burns, please do not sit on the toilet for a long time.
 GROUND WIRE	This appliance must be grounded. Connect this product only to a properly grounded power supply unit (device). • Improper connection may cause electric shock.
 MUST OBEY	Do not raise the toilet seat or lid while objects are resting on top of the unit. • Doing so may cause the main unit to come loose and fall, resulting in injury. Do not lean on cover when use this device to prevent product from damage.
 NO FIRE	Keep cigarettes and other open flames away from the product. • Failure to do so may cause fire.
 STOP	Do not apply strong force, mechanical shock, step on or stand on the toilet seat, toilet lid or main unit. Also do not place any heavy objects on the toilet seat, toilet lid or main unit. • Doing so may cause the main unit to crack or come loose and fall, resulting in injury. • Doing so may damage the product and cause injury or water damage.
	Never obstruct the warm air openings of the product with fingers or any other items. Ensure that the warm air openings remain unobstructed to prevent electric shock, personal injury, or damage to the product.

CAUTIONS AND WARNINGS

 STOP	Do not fold or crush the water supply hose, or damage it by cutting with a sharp object • Doing so may cause water leaks. When maintaining the plastic parts (main unit etc.) or the water supply hose, use a neutral kitchen detergent diluted with water. Do not use any of the following: toilet cleaner, household cleaner, benzene, paint thinner, powdered cleanser, or nylon scrubbing brush. • These items may damage or crack the plastic, potentially causing injury or malfunction. • Additionally, these items could damage the water supply hose and result in a water leak. To prevent a sudden water leak, never remove the water filter drain valve while the shut-off valve is open. • Doing so will cause water to spurt out unexpectedly.
	When installing the water filter drain valve, make sure that it is securely tightened in its proper position. • Failure to securely tighten it may cause a water leak.
 MUST OBEY	If a water leak occurs, always close the shut-off valve immediately.
	When the ambient temperature is expected to drop to 0°C or below, take measures to prevent damage to the pipes and hoses due to freezing. • Frozen water pipes can cause the main unit and connected pipes to crack, potentially resulting in a water leak. • To avoid this, regulate the room temperature to ensure that the pipes and hoses do not freeze during cold months. • Failure to properly secure and tighten connections may also cause a water leak.
	• Avoid exposing the product to direct sunlight, as this may cause changes in color or malfunction. • Do not urinate on the main unit, toilet seat, or wand, as this may result in malfunction or discoloration.

CAUTIONS AND WARNINGS



MUST OBEY


- Disconnect the power cord during thunderstorms.
- When the product will not be used for a long period of time, close the shut-off valve and then turn off the power to the product.
- The required water pressure should be between 0.08MPa and 0.5MPa.
- Use the water supply hose provided with the product. Do not use old or existing hoses.

TECHNICAL SPECIFICATIONS


Product Name	Smart Toilet
Rated Voltage	110-120V~
Rated Frequency	60Hz
Rated Power	45W
Flush Volume	1.28GPF(4.8LPF)
Waterproof Level	IPX4
Heated Seat Temperature	4 levels(Room Temperature to 104°F)
Operating Temperature	41-104°F
Water Entry Temperature	33.8-95°F
Supply Water Pressure	11.6-73 PSI(0.08MPa-0.5MPa)
Codes/Standards	ASME A112.19.2-2018/CSA B45.1-18 ASME A112.4.2-2021/CSA B45.16:21

- Maximum temperature of the water supplied by the product for hygiene purposes: 107°F.
- No further notice will be provided if any technical specifications change due to product improvements or technical updates. All actual technical specifications are subject to the final product.

PACKING LIST




Main Unit

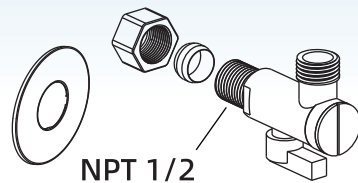

Angle Valve



Installation Manual and
Certificate of Competency




T-bolts



Aromatherapy
sheets



Decorative covers




Flange Plate


(Not included. Please purchase separately.)

PART LIST

Left Side

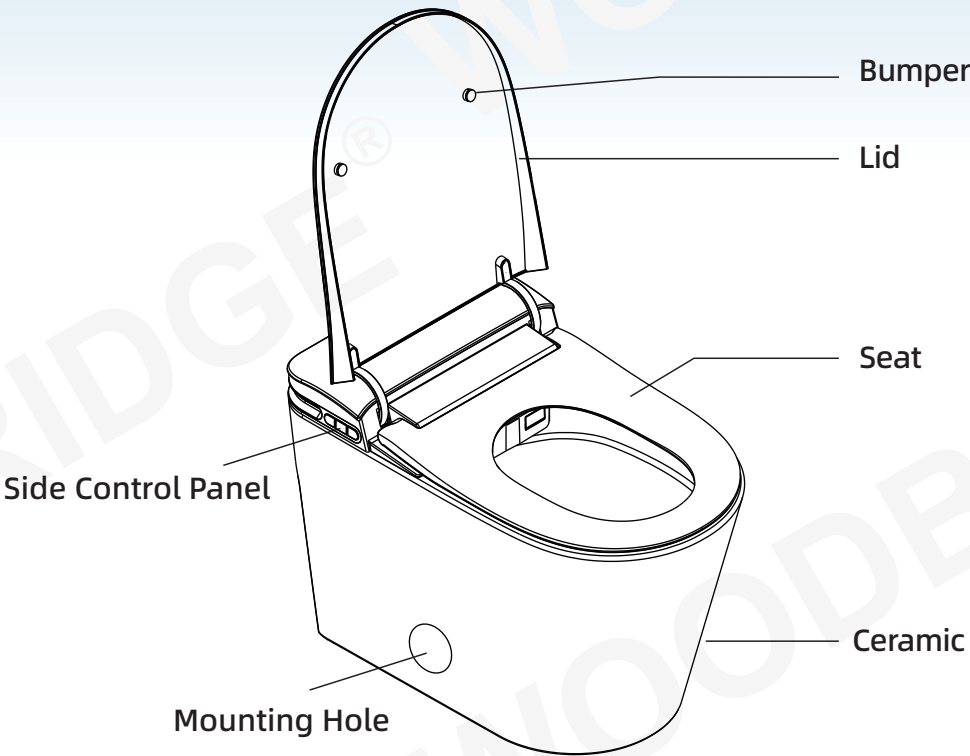


Right Side

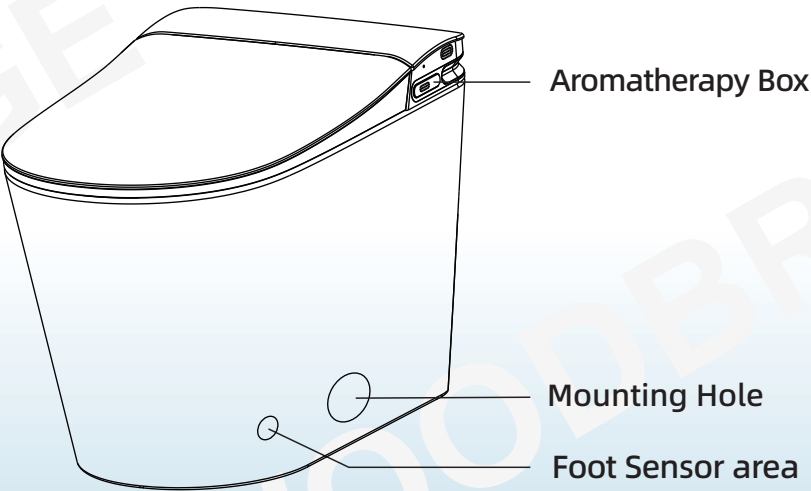

• The product drawing is for reference only. We reserve the right to modify the product's appearance. In case of any changes, the actual product shall prevail.

DIMENSIONS

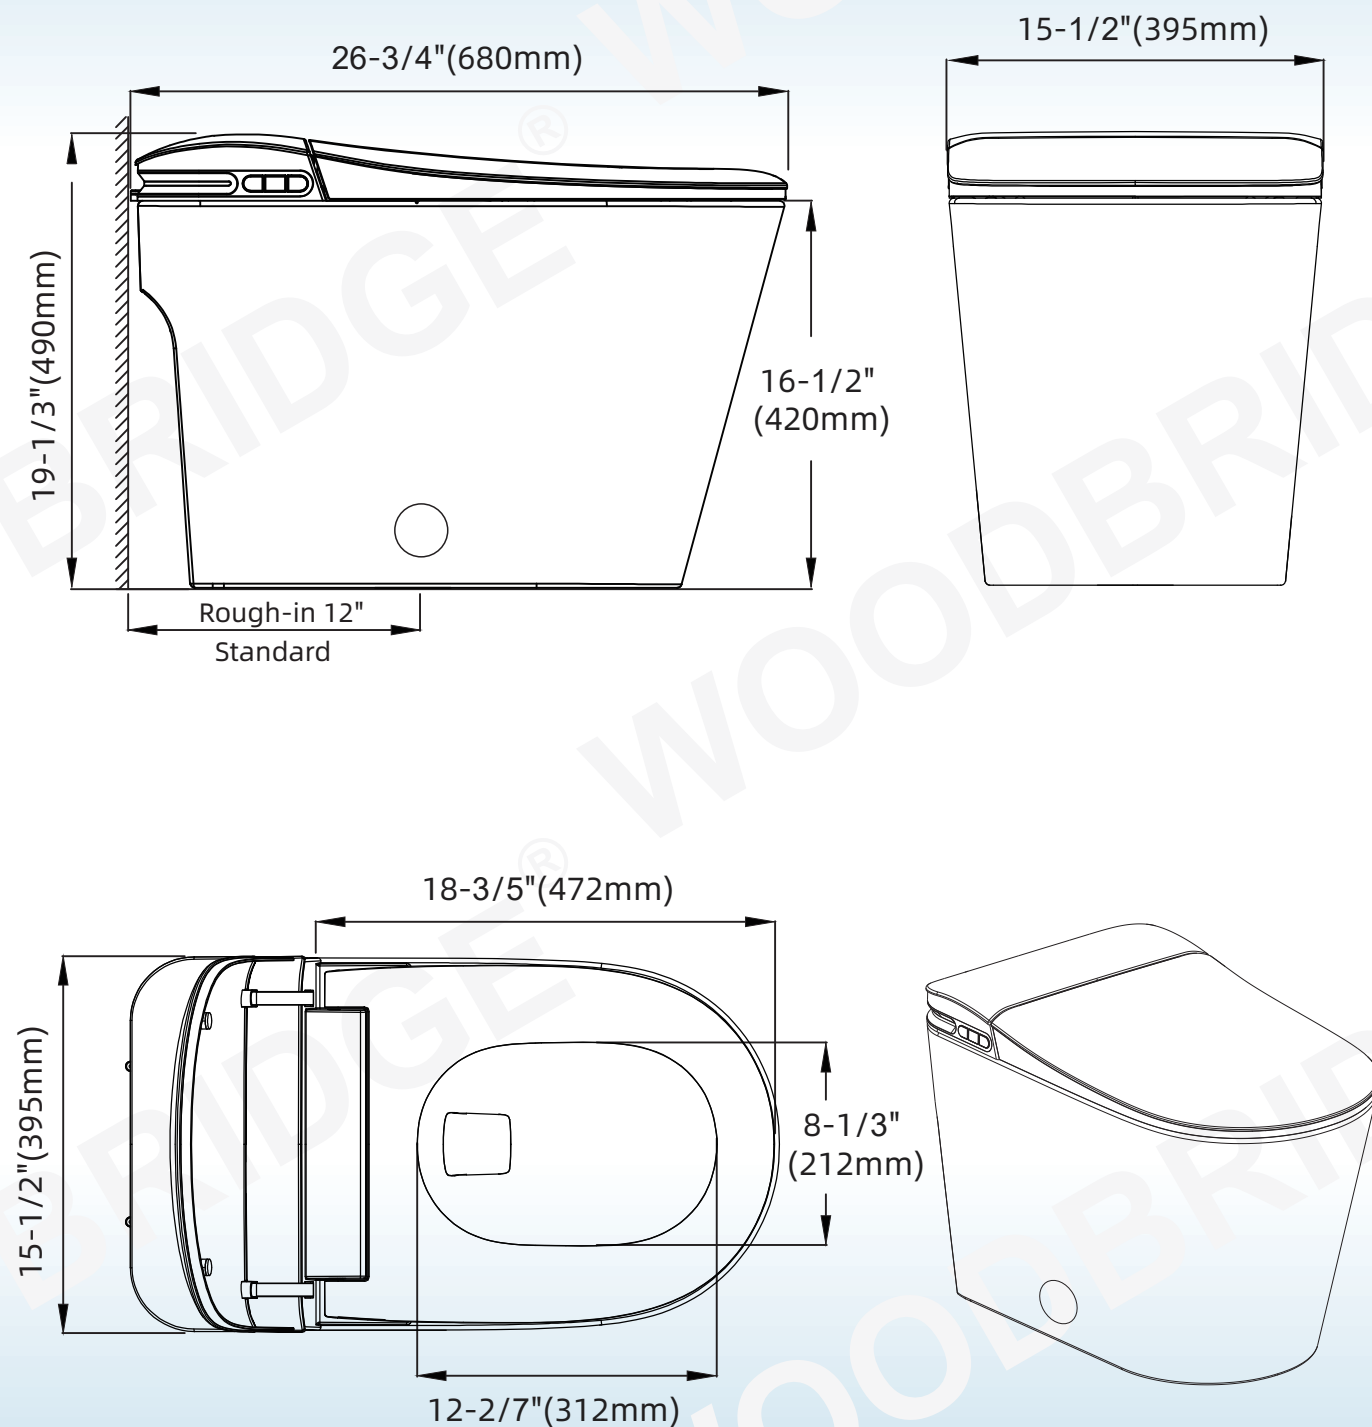


TOILET INSTALLATION

Required Tools:



Installation Diagram:

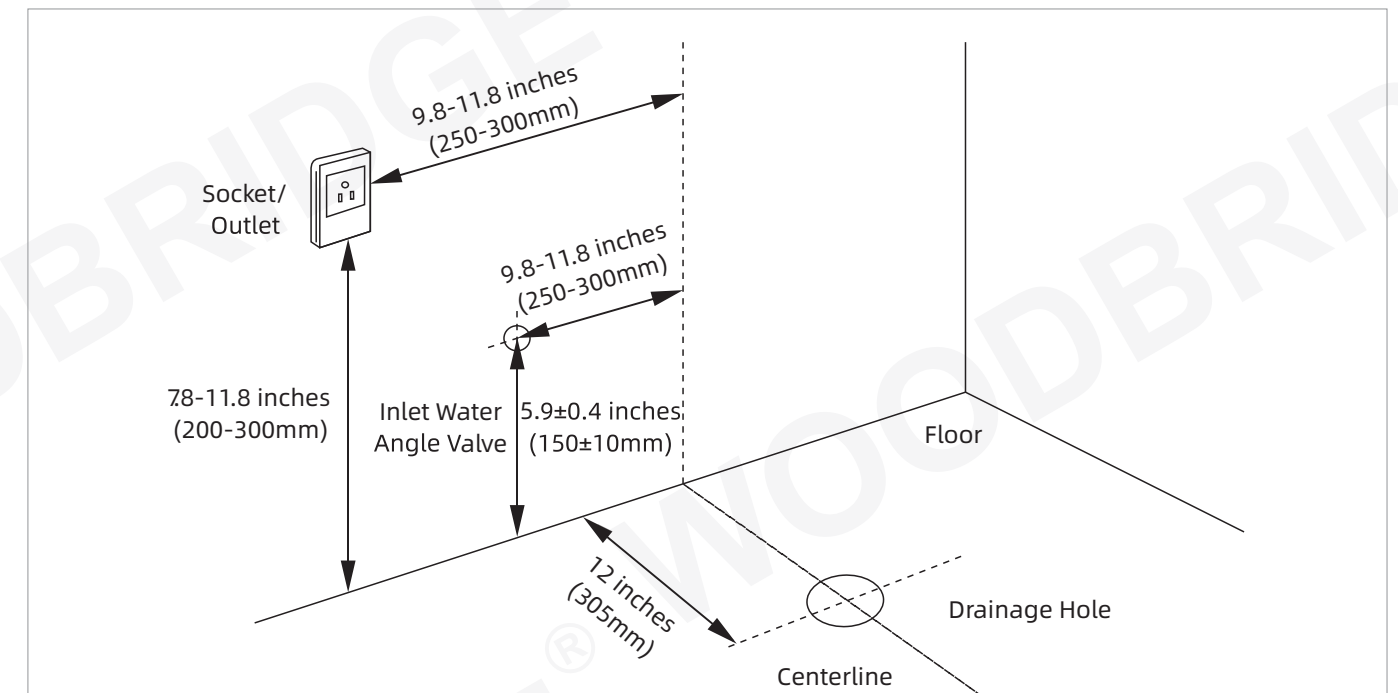


WARNING

Power Outlet Installation Instructions:

- Ensure that the power outlet is properly grounded in accordance with applicable electrical codes.
- The power cord should have a length of 1.5 meters. The location of the power outlet should be in close proximity to facilitate the installation and disassembly of this product, while also maintaining a safe distance from the bathtub area.
- It is strongly recommended to use a waterproof-type outlet. Do not use extension cords to connect this product. Failure to follow these instructions could result in fire or electrical shock.

Pre-Installation Precautions:

- Before installation, flush the pipe with water for 1 minute to remove any impurities remaining in the pipeline.

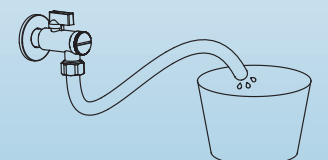


TOILET INSTALLATION

Installation Steps:

1. For a newly installed toilet in the bathroom, a flange plate needs to be added. (Flange plate is not included and installer has to purchase it for proper installation.)

- Place the flange plate into the drainage hole, aligning the arrow on the flange plate with the dashed line on the vertical wall. The center of the flange must align with the center line.
- Use a marker to indicate the positions of the four installation holes on the flange plate.
- Use a power drill to create four $\Phi 6\text{mm}$ installation holes on the flange plate. Insert four corresponding plastic anchors.
- Secure the flange plate in place using the provided four screws.

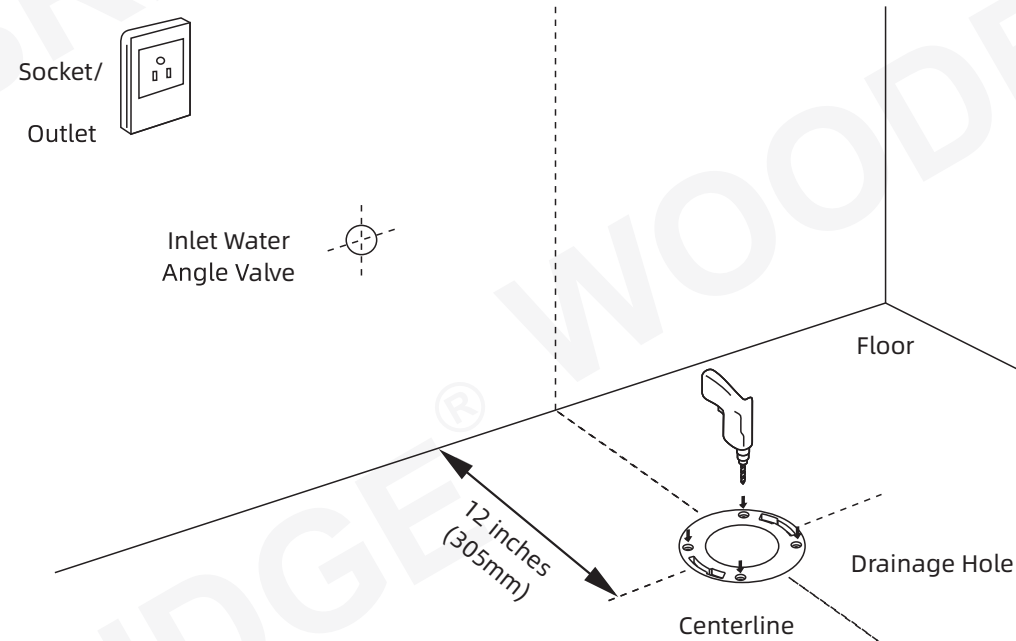

2. Install the floor bolts




Note: The two screws and the center of the flange must in a straight line

TOILET INSTALLATION


3. Install the wax ring

Put the wax ring on the flange.

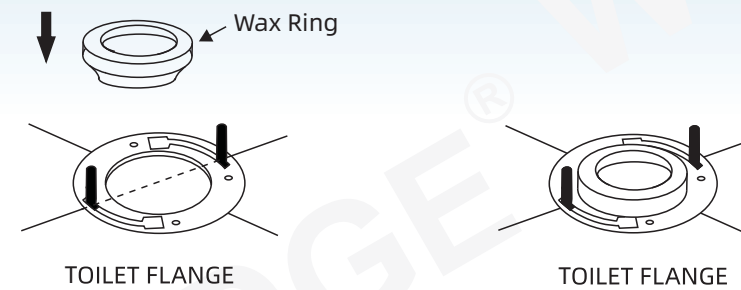


4. Install the toilet

Carefully lower the toilet onto the flange and press firmly to secure it.

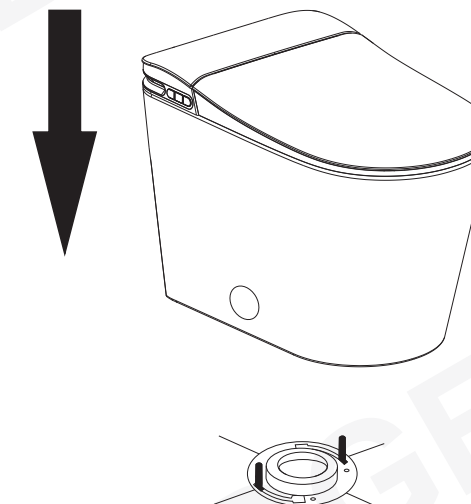


Place the washer and nut onto the T-bolt screw, then tighten securely.

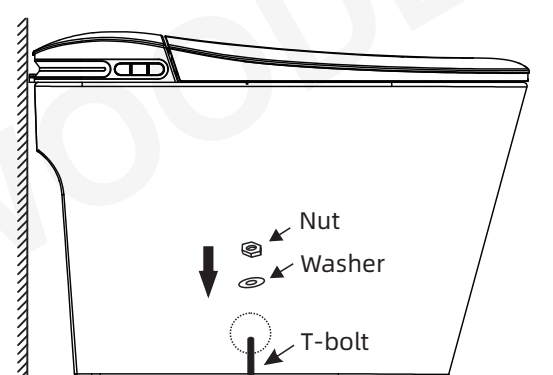

5. Install decorative cover

Cover both sides of the toilet with decorative covers.

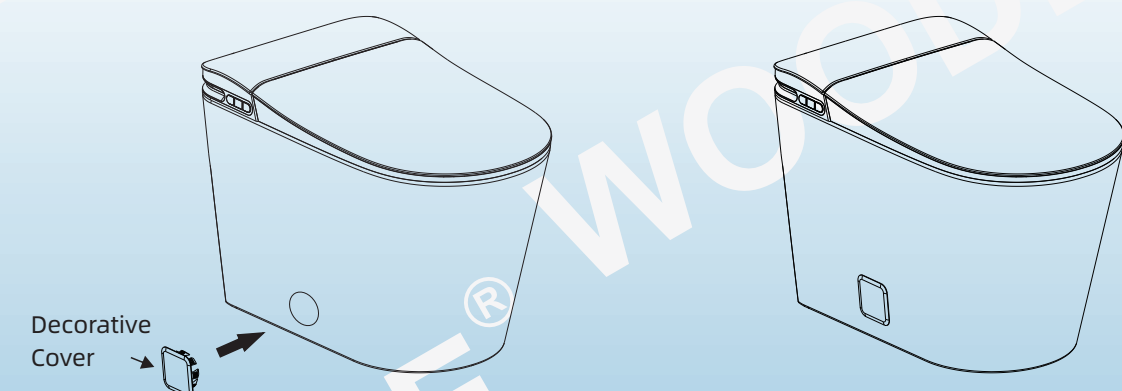


TOILET INSTALLATION


6. Install angle valve

6.1 Installation Method 1:

6.1.1 Remove the copper sleeve and nut from the NPT 1/2 valve.

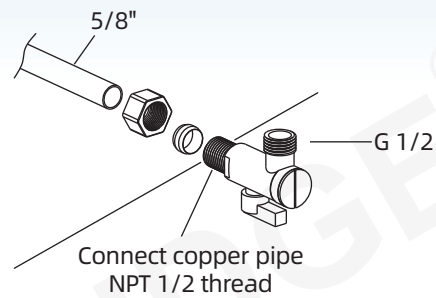


6.1.2 Insert the nut and copper sleeve into the copper tube in order, and then tighten the valve.

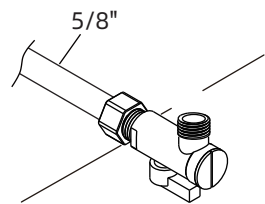


6.2 Installation Method 2:


6.2.1 Remove the copper sleeve and nut from the NPT 1/2 valve.

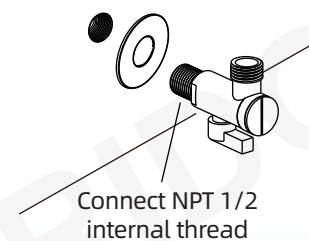

6.2.2 Screw the valve into water outlet.

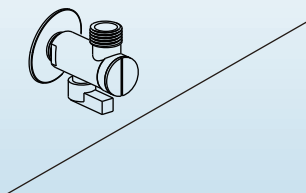


6.3 Apply a circle of anti-mold sealing silicone at the junction between the toilet and the floor. After the silicone sealant has solidified, plug in the power and slowly open the angle valve. Adjust the water pressure to within 80 PSI and check all connection points for leaks.

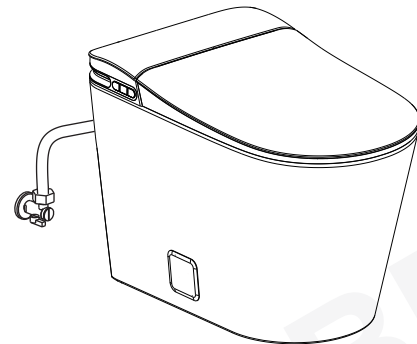

7. Install aromatherapy sheet

Lightly press the aromatherapy box to pop it out, then put in the aromatherapy sheet and then push the box back into place.

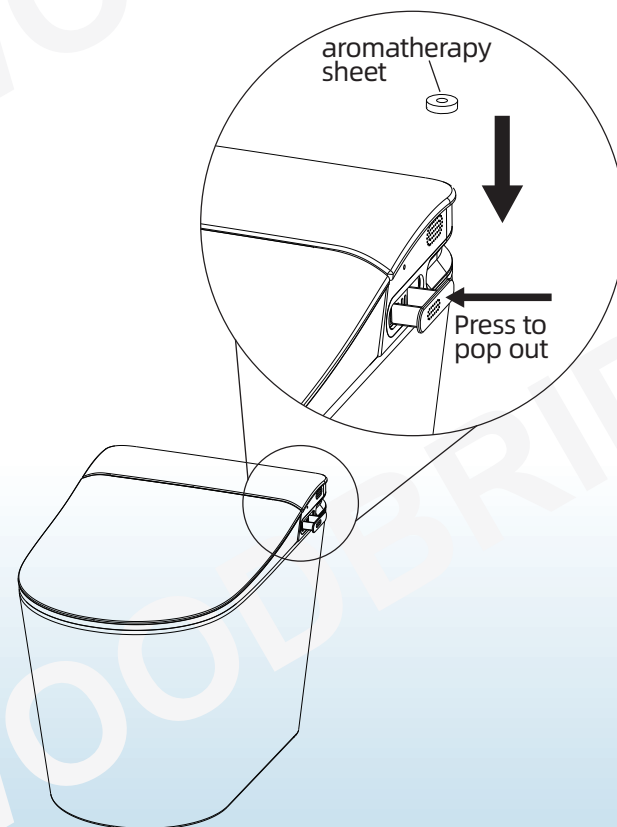


BEFORE USING

1. Turn on the angle valve

- Check the threaded connection to ensure there are no leaks.
- Unscrew the angle valve counterclockwise to fully open it.

(Tips: When opening the angle valve for the first time, the handle may require more torque.)

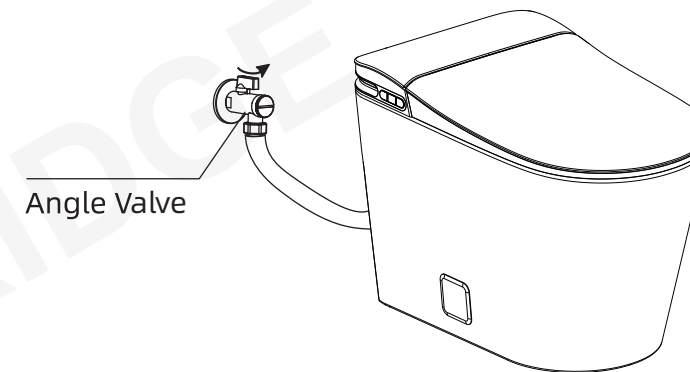


2. Power Connection

Insert the leakage protection plug into the power socket. Press the reset switch. The plug indicator lights up, indicating that the power is on.

Tips:

- Before usage, press the electric leakage test button. The reset switch should pop up, indicating that the leakage protection function is normal.
- Press the **TEST** button (then the **RESET** button) once a month to ensure proper operation.

Note: Only applicable for models equipped with a leakage protection plug. Please refer to the actual product for details.

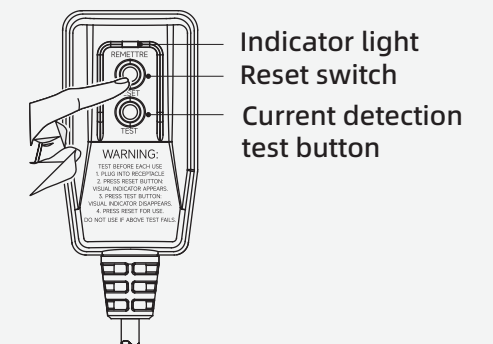

3. Self-inspection

- The main unit buzzer rings “beep”.
- After another “beep” from the buzzer, self-inspection is complete.
- Proceed to normal function mode for regular usage.

FUNCTION DESCRIPTION

Motion sensor flip cover

(This function is only available for automatic flip toilets)

- The seat cover opens or closes automatically by detecting the approach, presence, or departure of the user.
- When the seat cover is open, it will automatically close 10 seconds after the person leaves;
- When the seat ring is open, if the human body stays in front of the toilet for less than 7 seconds, the seat ring and cover will automatically close 10 seconds after leaving;
- When the seat is open, if a person stays in front of the toilet for more than 7 seconds, the seat ring and cover will automatically close and flush after 10 seconds of leaving.

Foot sensor flip

(This function is only available for automatic flip toilets)

- When the seat cover is closed, put your foot near the sensing area to open the seat cover;
- When the seat ring is closed, put your foot near the sensing area to open the seat ring;
- When the seat is open, if a person stays in front of the toilet for less than 7 seconds, put your foot near the sensing area to close the seat ring;
- When the seat is open, if a person stays in front of the toilet for more than 7 seconds, put your foot near the sensing area to close the seat ring and cover and flush.

Foot sensor flushing

(This function is only available for foot sensor flushing toilets)

Put your foot near the sensing area and it will flush once.

Auto Flush

When the human body is seated for more than 5 seconds, it will automatically flush after leaving the seat.

Moisturizing function

After the human body is seated, the moisturizing function is automatically activated, and the toilet automatically performs a pre-wetting cycle before flushing.

Deodorization

(This feature is optional, please based on the actual product)

After the human body is seated, the deodorization function will be automatically activated.


FUNCTION DESCRIPTION

Side Buttons:

The side control panel includes 4 functions: **[Flush]**, **[Seat Temp Adjustment]**, **[Open/Close the night light/atmosphere light]**, **[Open/Close the machine]**.

When the toilet is not occupied:


- Press the **"Flush"** button once, the machine will flush once.
- Press **"Seat Temp Increase"** button, the temperature will increase.
- Press **"Seat Temp Decrease"** button, the temperature will decrease.
- Press and hold the button of **"Seat Temp Decrease"** for 3 seconds to turn the night/atmosphere light ON or OFF.
- Press and hold **"Flush"** button for 3 seconds to turn the unit ON/OFF.

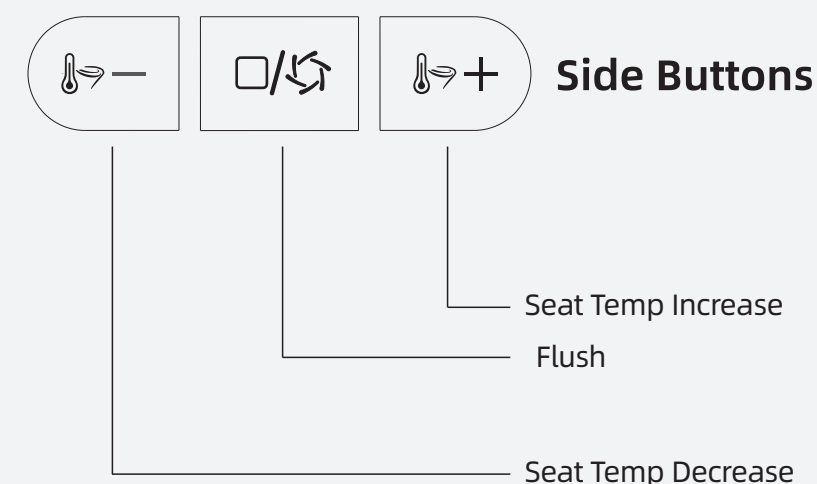

DAILY MAINTENANCE

Main unit care and maintenance

- 1. Shut off power supply before performing maintenance.
- 2. Wipe stains with a soft damp cloth.

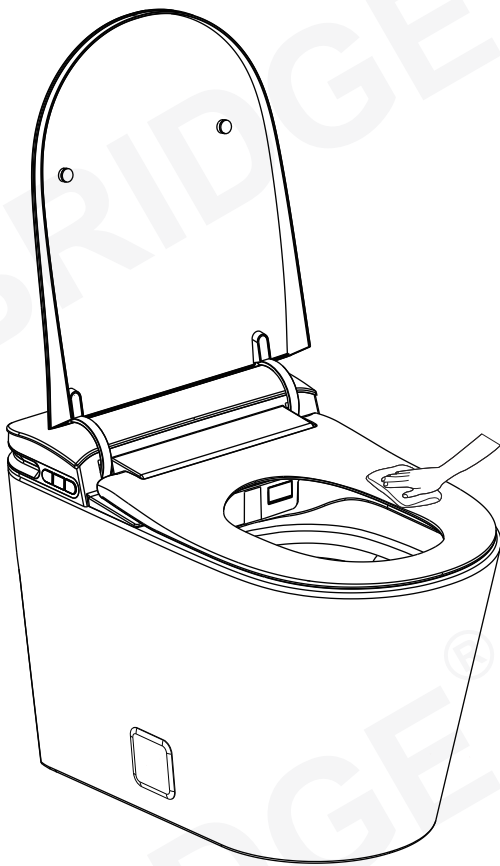


- 3. After cleaning, reconnect the toilet to the power supply.


Maintenance of filter net

Maintenance is required when the system is under normal water pressure but experiencing poor flush performance.

- 1. Turn off power and the angle valve.
- 2. Unscrew angle valve nut.

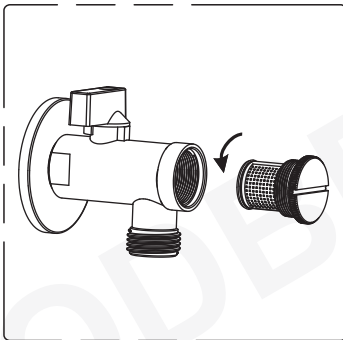

- 3. Use a brush to clean filter net.

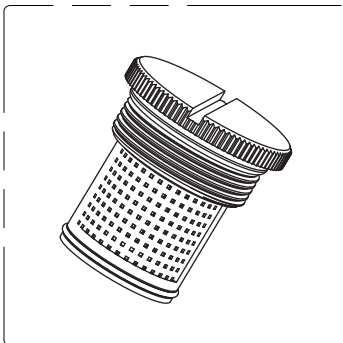

- 4. Reinstall filter net.
- 5. Turn on the angle valve and reconnect the power. The toilet will return to normal operation after self-inspection.

TROUBLESHOOTING GUIDE

Problem	Cause	Solution
Low seat temperature	The seat temperature is setted on normal temperature level	Reset the seat temperature
Toilet leaking	Close the angle valve, inspect all water pipes, and contact a professional.	
	If the problems cannot be resolved using the methods above, please turn off the power and the angle valve, then contact service providers for maintenance.	
	If the leakage circuit breaker frequently trips, indicating electrical leakage, turn off the power and the angle valve, then contact the service provider for maintenance.	

WARRANTY

Woodbridge warrants the following products as listed in below to be free from defects in material and workmanship, subjected to the limitations set forth in this limited warranty.

- Bathtub, Whirlpool/Air Bubble Massage Tub, Cold Plunge, Wooden Tub: 1 Year limited to be free of defects in material and workmanship.
- Sauna room and Sauna Tent: 1 Year limited to be free of defects in material and workmanship.
- Toilet and Bidet: 1 Year limited to be free of defects in material and workmanship.
- Faucet: 1 Year limited to be free of defects in material and workmanship.
- Vanity and Vanity Top: 1 Year limited to be free of defects in material and workmanship.
- Granite, Marble, Engineered Quartz Vanity Top: 1 Year limited to be free of defects in material and workmanship.
- Medicine Cabinet, LED Mirror: 1 Year limited to be free of defects in material and workmanship.
- Stainless Steel Sink: 1 Year limited to be free of defects in material and workmanship.
- Solid Surface Shower Wall Panel, Shower Base: 10 Years limited warranty to be free from material defects.
- Drain Cover and PVC Drain: 1 Year limited to be free of defects in material and workmanship.
- Shower Door: Lifetime warranty on glass components and 1 Year limited on other hardware.

This limited warranty is non-transferable and only applies to products purchased and installed in the United States and Canada

This limited warranty excludes all industrial, commercial and business usage. Proof of purchase (original sales receipt) from the original purchaser, Description and pictures of defect, model number or model description must be provided to Woodbridge Bath for all warranty claims and Woodbridge Bath IS NOT responsible for labor cost, removal or installation costs.

This limited warranty shall not apply to goods which have been subject to accident, negligence, improper installation, product abuse, product misuse, or use of cleaners containing abrasives, alcohol or other organic solvents, whether performed by a contractor, service company, or yourself, are excluded from this warranty.

This warranty does not cover surface damaged caused by use of chemicals that break through or dissolve the surface finish or damage caused by the accidental dropping of sharp or heavy objects. Improper care and use of abrasive cleaners and will void the warranty.

During this limited warranty period if a malfunction occurs and after inspection it is determined that a defect developed during normal use, Woodbridge will as at its election proceed withon any of the following options:

- (1) repair or replace the defective part(s) or product(s) at cost
- (2) issue a refund of the original purchase price of the product(s) (Valid within 30 days from the date of purchase)
- (3) issue a credit to be applied toward the purchase of a new product. Shipping/delivery charges may apply and are in sole discretion.

Caution:
NEVER use cleaners containing abrasives, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome finishes. Doing so will void the warranty.
Woodbridge products should be installed by a fully insured and licensed contractor only. Installation by anyone other than fully insured and licensed contractor will void this limited warranty.

RESPONSIBILITIES OF OTHERS

Inspecting the unit prior to installation is the responsibility of the installer or building contractor who acts on behalf of the user. They are responsible for ensuring the unit is free of defect or damage. Notices are placed on the unit and on the shipping carton advising the installer of this responsibility. In the event of a problem, the unit must not be installed. Woodbridge is not responsible for failures or damage that could have been discovered, repaired, or avoided by proper inspection and testing prior to installation.

Damage occurring in transit is the responsibility of the carrier. The user or installer MUST open the crate and inspect the unit for damage when it is delivered. If damage is discovered, it must be reported immediately to the seller and the carrier in writing, and an inspection requested. Failure of the carrier to respond should be reported to the seller and the carrier. Your freight claims should be filed promptly thereafter.

This limited warranty does not cover any liability for consequential or incidental damages, all of which are hereby expressly disclaimed, or the extension beyond the duration of this limited warranty of any implied limited warranties, including those of merchant ability or fitness for an intended purpose.

DISCLAIMER

Except as expressly provided, there shall be no warranty or obligation, express or implied, oral or statutory. No dealer or other person has the authority to make any warranties or representations concerning or its products. In no event shall be held responsible for any such warranties or representations.

Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion on limitation of special, incidental or consequential damages, so these limitations and exclusions may not apply to you. This warranty gives you specific legal rights, you may also have other rights which vary from state/province to state/province.

To obtain warranty and replacement parts, please send e-mail to help@woodbridgebath.com with the original receipt information, Woodbridge will determine whether to repair or replace your product, issue a refund or issue a credit.